


## Introduction

The Submersible Battery Pack P/N 2200-601 contains a rechargeable lithium-ion battery and battery pack charger. The battery pack is used together with the Internal Datalogger to provide self-contained use for the C6 Multi-Sensor Platform, PhytoFind, C3 and C6P Submersible Fluorometers. The battery pack has a 600m depth rating and facilitates vertical profiling and moored applications.

Battery Bracket P/N 2300-603 for the C3 and C6; and P/N 2360-603 for the C6P and PhytoFind are required.

## Charging the Battery

- 1) Carefully align the battery's connector to the pins of the charger and push the battery straight onto the charger.
- 2) Plug the charger into a standard wall outlet and allow the battery to charge for 6 hours for a complete battery charge.
- 3) When finished, unplug the charger and remove the battery by pulling the battery straight out from the charger's connector.

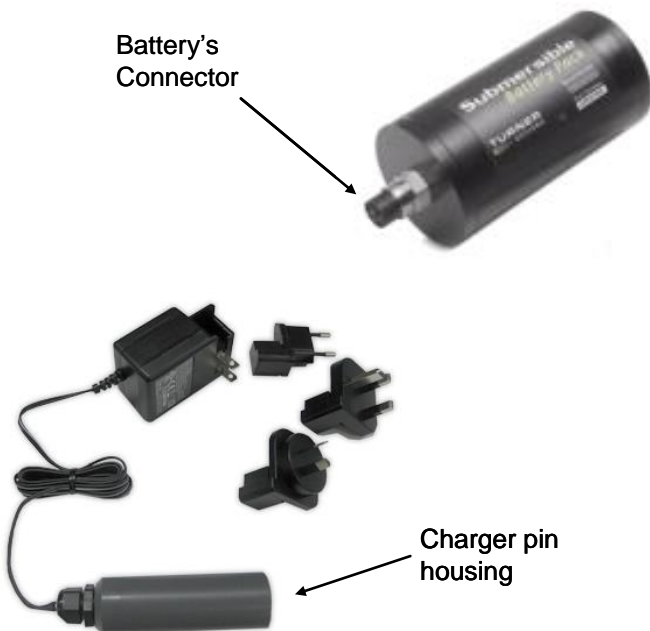

## LED Light Indications

Off	No battery detected
Power up	Single green flash
Green flashing	Fast charging
Green solid	Fully charged

## General Precautions

Under no circumstances should you attempt to open the battery housing. Please contact Turner Designs if you have any problems or questions related to the battery pack.

## Battery Life

The battery is designed, when fully charged, to exceed the Internal Data Logging capacity at the maximum sampling rate. For longer deployments at shorter sampling intervals, we recommend recharging the battery after the Internal Data Logger is full.

## Specifications

Dimensions	5.3" x 2.75" (13.46cm x 7.0cm)
Weight in Air	1.65lbs. (0.75kg)
Weight in Water	0.50lbs (0.22kg)
Material	Delrin
Rated Depth	600m (1969 feet)
Voltage Output	14.8V nominal
Battery Type	Lithium-ion
Number of Cells	4
Capacity	2,200mAH
Charge Time*	6 hours
Connector	8 pin connector
Protection Features	Protects against: Overcharge, over-discharge, overheating, and short-circuiting

\*Charge with Turner Designs charger only